

Self-powered sensors

Harvesting electricity from small temperature differences could enable a new generation of electronic devices that don't need batteries

David L. Chandler, MIT News Office

February 11, 2010

[email](#)
[comment](#)
[print](#)
[share](#)

This is the first of a two-part series about MIT research on harnessing micro-sources of power.

It can be inconvenient to replace batteries in devices that need to work over long periods of time. Doctors might have to get beneath a patient's skin to replace batteries for implanted biomedical monitoring or treatment systems. Batteries used in devices that monitor machinery, infrastructure or industrial installations may be crammed into hard-to-reach nooks or distributed over wide areas that are often difficult to access.


But new technology being developed by MIT researchers could make such replacements unnecessary.

Soon, such devices could be powered just by differences in temperature between the body (or another warm object) and the surrounding air, eliminating or reducing the need for a battery. They would use new energy-scavenging systems being developed by Anantha Chandrakasan, MIT's Joseph F. and Nancy P. Keithley Professor of Electrical Engineering and director of the MIT Microsystems Technology Laboratories, and Yogesh Ramadass SM '06, PhD '09.

Such a system, for example, could enable 24-hour-a-day monitoring of heart rate, blood sugar or other biomedical data, through a simple device worn on a patient's arm or a leg and powered by the body's temperature (which, except on a 98.6-degree F summer day, would always be different from the surrounding air). A similarly powered system could monitor the warm exhaust gases in the flues of a chemical plant, or air quality in the ducts of a heating and ventilation system.

The concept of harvesting energy from differences in temperature is nothing new. Many technologies for doing so have been developed, including devices NASA has used to power probes sent into deep space (the probes harvest heat from radioactive plutonium). Certain semiconductor materials, by their nature, will produce a flow of electrical current when one side is hotter than the other — or, conversely, will produce a difference in temperature when a current is run through them. Such materials are already used for solid-state coolers and heaters for food or beverages.

The principle was discovered in the 19th century, but only in recent years has it been seriously explored as an energy source. In thermoelectric materials, as soon as there is

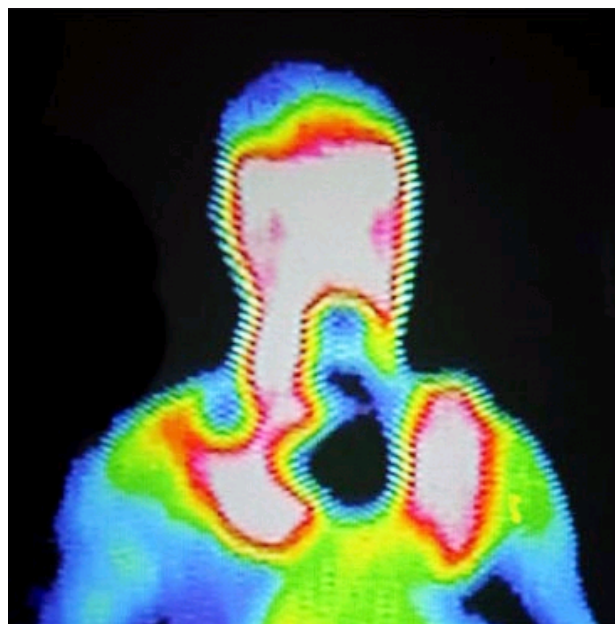

today's news

How to turn blueprints green



Graphic: Christine Daniloff

Open-source program developed at MIT allows architects and engineers to optimize a building's energy systems early in the design process

Banking on mobile money

February 23, 2010

Life beyond our universe

February 22, 2010

top stories about electrical engineering and electronics

A new way to build membranes for fuel cells

February 17, 2010

Power from motion and vibrations

February 16, 2010

Nonlinear thinker

January 29, 2010

Jack Wozencraft, information theorist at MIT, 1925-2009

January 21, 2010

related

Read part two, "Power from motion and vibrations"

Anantha Chandrakasan

Microsystems Technology Laboratories

ARCHIVE: "Team develops energy-efficient microchip"

tags

electrical engineering and electronics

energy

health sciences and technology

innovation and inventions

microsystems technology laboratories

a temperature difference, heat begins to flow from the hotter to the cooler side. In the process, at the atomic scale this heat flow propels charge carriers (known as electrons or electron holes) to migrate in the same direction, producing an electric current — and a voltage difference between the two sides.

The key to making this principle practical for low-powered devices is to harness as much as possible of the available energy. Chandrakasan and Ramadass have been working to get as close as possible to the theoretical limits of efficiency in tapping this heat energy.

The higher the temperature difference, the greater the potential for producing power, and most such power-generating devices are designed to exploit differences of tens to hundreds of degrees C. The unique aspect of the new MIT-developed devices is their ability to harness differences of just one or two degrees, producing tiny (about 100 microwatts) but nevertheless usable amounts of electric power. The key to the new technology is a control circuit that optimizes the match between the energy output from the thermoelectric material and the storage system connected to it, in this case a storage capacitor. The findings were presented this week at the International Solid State Circuits Conference in San Francisco.

Because thermoelectric systems rely on a difference in temperature between one side of the device and the other, they are not usable for implanted medical devices, where they would be in a uniform-temperature environment. The present experimental versions of the device require a metal heat-sink worn on an arm or leg, exposed to the ambient air. "There's work to be done on miniaturizing the whole system," Ramadass says. This might be accomplished by combining and simplifying the electronics and by improving airflow over the heat sink.

Ramadass says that as a result of research over the last decade, the power consumption of various electronic sensors, processors and communications devices has been greatly reduced, making it possible to power such devices from very low-power energy harvesting systems such as this wearable thermoelectric system.

David Lamb, chief operating officer of Camgian Microsystems, a company that produces a variety of low-power, lightweight semiconductor chips, says that "we believe the wireless sensor products we are developing will all migrate to energy harvesting, as we push their size, weight and power down." He adds that the research of Chandrakasan and Ramadass "is in the critical path of technologies required by companies such as Camgian that are developing next-generation microsystems."


Devices to use this power would in most cases still need some energy storage system, so that the constant slow trickle of energy could be accumulated and used in short bursts, for example to operate a transmitter to send data readings back to a receiver. Different ways of storing the energy are possible, such as the use of ultracapacitors, Ramadass says. "These will play a critical role, in order to build a complete energy harvesting system," he says.

After years of work on these highly efficient energy-scavenging devices, currently funded by a seed grant from the [MIT Energy Initiative](#), Chandrakasan says, "the time has come to find the real applications and realize the vision."

Read part two of this series, "[Power from motion and vibrations.](#)"

Comments

[Log in to write comments](#)

 **mustafasanar - News** 2010-02-11 04:53:28
After years of work on these highly efficient energy-scavenging devices, currently funded by a seed grant from the MIT Energy Initiative, Chandrakasan says, "the time has come to find the real applications and realize the vision."

 **ramseshan - Self-powered sensors** 2010-02-16 06:46:19

This is a great innovation indeed! The article says "the device require a metal heat-sink worn on an arm or leg". Depending on whether it is winter or summer(night or day, indoor or outdoor), the direction of current would be different, would it not? It is nice that this circuit is able to harness the energy regarless of which direction the current flows.

 Telyatnikov - **price**

2010-02-16 06:46:01

It's great if all batteries are recharging by itself. But now this technology isn't wide used in medicine.

How much does this self-charged batteries cost?

And how much does production of such batteries cost?



MIT news | 77 Massachusetts Avenue, Room 11-400 | Cambridge, MA 02139-4307 | Tel 617.253.2700 | TTY 617.258.9344
twitter | rss | contact | about the mit news office | comment on this site | **Massachusetts Institute of Technology**

[GIVE TO MIT >>](#)