

Research Article

Breast Tumor Simulation and Parameters Estimation Using Evolutionary Algorithms

Manu Mital and Ramana M. Pidaparti

Department of Mechanical Engineering, Virginia Commonwealth University, Richmond, VA 23284, USA

Correspondence should be addressed to Ramana M. Pidaparti, rmpidaparti@vcu.edu

Received 20 September 2007; Revised 7 December 2007; Accepted 20 February 2008

Recommended by Ewa Pietka

An estimation methodology is presented to determine the breast tumor parameters using the surface temperature profile that may be obtained by infrared thermography. The estimation methodology involves evolutionary algorithms using artificial neural network (ANN) and genetic algorithm (GA). The ANN is used to map the relationship of tumor parameters (depth, size, and heat generation) to the temperature profile over the idealized breast model. The relationship obtained from ANN is compared to that obtained by finite element software. Results from ANN training/testing were in good agreement with those obtained from finite element model. After ANN validation, GA is used to estimate tumor parameters by minimizing a fitness function involving comparing the temperature profiles from simulated or clinical data to those obtained by ANN. Results show that it is possible to determine the depth, diameter, and heat generation rate from the surface temperature data (with 5% random noise) with good accuracy for the 2D model. With 10% noise, the accuracy of estimation deteriorates for deep-seated tumors with low heat generation. In order to further develop this methodology for use in a clinical scenario, several aspects such as 3D breast geometry and the effects of nonuniform cooling should be considered in future investigations.

Copyright © 2008 M. Mital and R. M. Pidaparti. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

1. Introduction

Breast cancer, which is common among women, is an international concern. There are about 200 000 cases a year, and it is estimated that there are more than 1 million women with undetected breast cancer. Among various techniques to detect breast cancer, infrared (IR) imaging has been widely used since the late 1950's. In general, the temperature of the human body on the surface of the skin depends on the metabolic activity, the blood flow, and the temperature of the surroundings. Any abnormality in the tissue, such as the presence of a tumor, alters the normal temperature on the skin surface due to increased metabolic activity of the tumor. Therefore, abnormal skin temperature profiles are an indication of diseases such as mastitis, benign tumors, fibrocystic breast disease, and cancer. Lawson [1] was the first to propose the use of thermographic detection of breast cancer, when he observed that the local temperatures of the skin over a tumor were significantly higher (about 2-3 degrees) than normal skin temperatures. Lawson and Chughtai [2] established that

the regional temperature difference over an embedded tumor was due to convection effects associated with increased blood perfusion, and increased metabolism around the tumor.

Thermography, also known as thermal or infrared imaging, is a procedure to determine if an abnormality is present in the breast tissue surface temperature distribution. This abnormality in temperature distribution might indicate the presence of an embedded tumor. Amalu [3] and Keyserlingk et al. [4] have reviewed the role of infrared thermography with respect to the role of IR imaging in the detection of breast cancer and risk indicator. They [3, 4] concluded that the IR imaging has a significant role to play in breast cancer screening due to its ability to image metabolic aspects of the breast and along with sensitivity, specificity, and prognostics. Further aspects of IR imaging techniques of breast cancer and detection methods from infrared images are described in detail and compiled in a recent book by Diakides and Bronzino [5].

In order to complement the IR imaging techniques of breast tumor detection, models have been proposed to

estimate the temperature distributions over breast with and without tumors. For example, Sudarshan et al. [6] studied the temperature distributions in breast cancer by considering a two-dimensional model first proposed by Romrel and Bland [7]. In this model, Pennes bioheat equation was used to describe the flow of thermal energy. The breast model consisted of a subcutaneous fat layer, followed by a gland layer and a deep muscle layer adjacent to the thoracic wall. Using this model, the effects of the tumor size, depth, and the blood perfusion rate on the surface temperature magnitude and profile were determined. Evolutionary algorithms based on neural networks and genetic algorithms have been proposed to detect abnormalities in several applications (such as ECG, tomography, ultrasound); see, for example, Diakides and Bronzino [5]. Recently, Mital and Scott [8] developed a method to determine parameters of an embedded heat source representing a tumor using infrared imaging. It appears that based on literature there are no methods available to estimate the tumor parameters based on the temperature distribution obtained from IR imaging techniques.

The objective of this study is the development of a methodology to estimate the depth, size, and heat generation rate of an embedded tumor in the breast, based on temperature profile on the surface that may be obtained by infrared thermography. This study differs from other works related to breast cancer in that inverse methods are used in the estimation methodology. The methodology is demonstrated with a simple model in order to illustrate the details of the procedures involved. Several cases of various embedded tumor conditions were presented to illustrate the generality of the method.

2. Estimation Methodology and Procedure

The estimation methodology involves evolutionary algorithms using artificial neural network (ANN) and genetic algorithm (GA) as shown in Figure 1. The ANN is used to map the relationship of tumor depth, tumor size, and the heat generation to the temperature profile over the idealized breast model. The relationship obtained from ANN is compared and validated to that obtained by standard numerical model-based finite element analysis software (ANSYS). GA is used to estimate the tumor parameters (depth, size, and heat generation) by minimizing a fitness function involving the temperature profiles obtained from simulated or clinical data to those obtained by ANN. The fitness function is given as a sum of the squares' function that relates the data from the observed thermographic temperature profile to the temperature profile for a given set of estimated parameters. It is defined as

$$S = [\mathbf{Y} - \mathbf{T}(\boldsymbol{\beta})]^T [\mathbf{Y} - \mathbf{T}(\boldsymbol{\beta})], \quad (1)$$

where \mathbf{Y} and \mathbf{T} are vectors containing the observed and estimated temperatures, respectively, and superscript T denotes the transpose of the vector. The observed temperature vector \mathbf{Y} contains surface temperatures that would be obtained

experimentally from thermal imaging. The estimated temperatures contained in vector \mathbf{T} are obtained by the outputs of the trained neural network model using estimates for the unknown parameters (from the *population* pool of the GA). The vector containing the estimates for unknown parameters is denoted by $\boldsymbol{\beta}$. In this study, the unknown parameter vector $\boldsymbol{\beta}$ contains the depth, diameter, and the heat generation rate of the source. Once the objective function was formulated, the estimation scheme using GA was used to determine the unknown parameters.

3. Artificial Neural Network Model to Map Breast Temperature Profiles

A multilayer feed-forward ANN with backpropagation learning algorithm is developed to represent the surface temperature profile of the breast as a function of depth, diameter, and heat generation rate of the tumor. The network is developed with the MATLAB Neural Network Toolbox using the "newff" function. The learning rate was set reasonably low at 0.05 to ensure convergence of the algorithm. There are many transfer functions available in MATLAB software. After some experimentation, the "logsig" transfer function was chosen for the hidden layers and the output neurons, due to nature of the desired outputs. A schematic of the network is shown in Figure 2. The network has 3 input nodes for the three parameters, and 31 output nodes that define one half of the symmetrical temperature profile on the skin surface. There are 2 hidden layers in the network, the first with 21 nodes, and the second with 19 nodes. This configuration was reached after a few iterations of a single hidden layer network proved to give less than adequate results. Two layer deep-nested loops were used in an exhaustive search that varied the number of neurons in the first and second hidden layers, and found the appropriate combination (21-19) that best trained the network. Therefore, a 3-21-19-31 neural network architecture was developed and trained and tested to validate the model. More details about the neural networks and their concepts can be found in Russell and Norvig [9].

In this study, a simplified 2D model of the cross-section of the breast similar to that used by Sudershan et al. [6] was considered, as shown in Figure 3. The Pennes bioheat equation has to be solved to estimate the temperature distribution over the breast model. Due to the complexity of the breast geometry, there are no known analytical solutions to the bioheat equation. Therefore, solutions are usually obtained using computational techniques such as the finite element method. A finite element model created using a commercially available finite element package, ANSYS, solves the Pennes bioheat equation to find the surface temperatures, and this information is used in training/validating ANN model. In this study, the breast is assumed to be of 0.072 m radius hemispherical shape, with a subcutaneous fat layer of 0.005 m uniform thickness, followed by gland, muscle, and the thoracic wall. The tumor is situated symmetrically in the gland layer and assumed to be circular in shape for simplicity. Note that the entire breast is modeled even though the 2D geometry is symmetrical about the Y axis. This is done

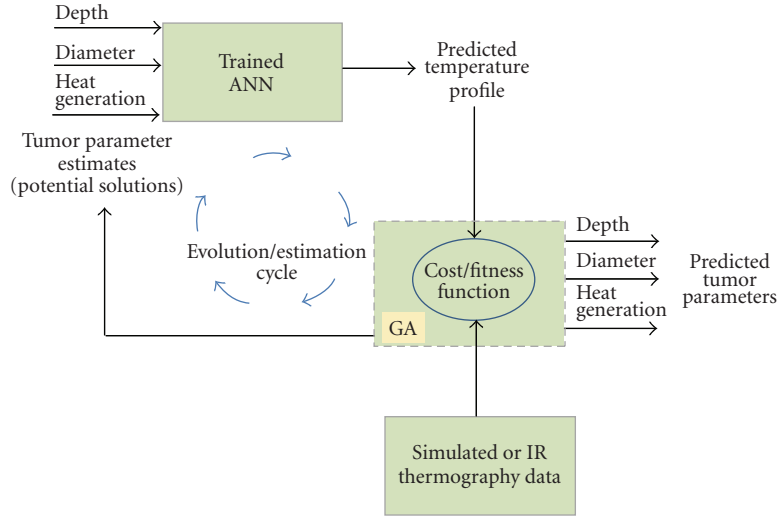


FIGURE 1: Overall estimation methodology for prediction of breast tumor parameters.

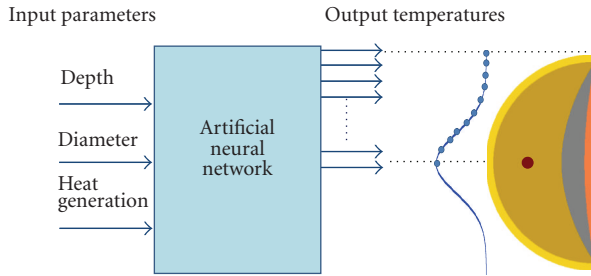


FIGURE 2: Schematic of the neural network.

for future studies where an offcenter tumor location may be considered. The heat transfer in each layer is governed by (1). The values of thermal conductivity, metabolic heat generation rate, and the perfusion source term for each layer, adopted from Werner and Buse [10], are presented in Table 1. The thoracic wall is assumed to be maintained at a constant core body temperature of 37°C. Based on estimate by Osman and Afify [11], the surface of the breast is subjected to a combined heat transfer coefficient (convection, radiation, and evaporation) of 13.5 W/m²-K, a reasonable value in the absence of forced convection. The clinical environment under which the thermographic measurements are made is assumed to be at a constant temperature of 21°C.

Using the finite element analysis of the breast model, a total of 17 different cases were analyzed and used for training the ANN. The inputs parameters are scaled between 0 and 1 using upper and lower bounds for each parameter. The diameter of the tumor is allowed to vary between 0.005 and 0.015 m so that it is in mammary gland region. The bounds for depth are 0.014 and 0.041 m (based on the assumption that the tumor will most likely be present in the gland). The lower and upper bounds on the heat generation rate of the tumor are 20 times (14,000 W/m³) and 100 times (70,000 W/m³) that of normal tissue. The output surface

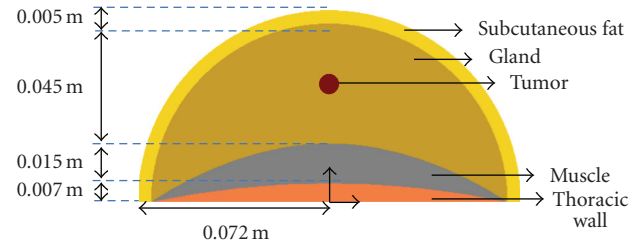


FIGURE 3: A 2D model of the breast based on Sudershan et al. [6].

temperatures of the network are scaled values between 0 and 1, using a lower limit of 26°C and upper limit of 33°C. The network was trained for 400 epochs or training cycles using the data generated from finite element analysis results. Three different cases were used for validating the trained network.

4. Genetic Algorithms in Breast Tumor Parameters Estimation

In the implementation of the GA, the potential solution (*chromosome*) contains the depth, diameter, and the tumor heat generation rate as the 3 *genes* and 10 *bits* are used to represent the value of each *gene* in binary format. Therefore, each *chromosome* has 30 bits. The *population* size has been chosen to be 20. The initial *population* pool was generated using a random number generator.

The parameters contained in each *chromosome* are changed from their binary representation to floating point representation using (for the *i*th parameter)

$$P_i = a + \frac{b - a}{2^{nb} - 1}(m), \quad (2)$$

where P_i is the decimal value of *i*th parameter, a and b are the lower and upper limits of the search interval, respectively, nb is the number of bits used to represent the parameter (e.g., 10 in this case), and m is the decimal value of the parameter

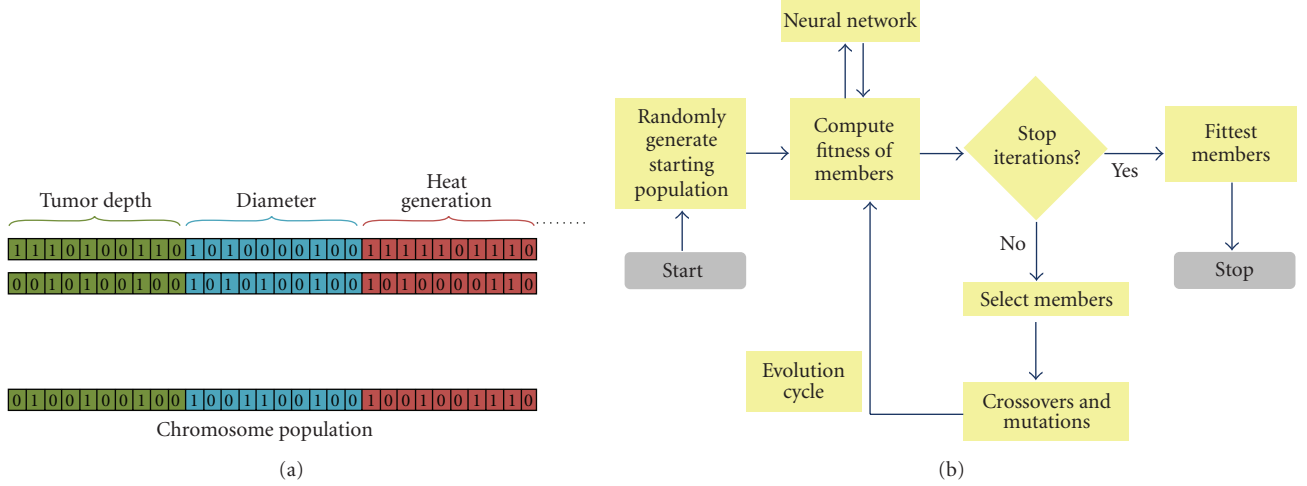


FIGURE 4: Flowchart of the GA estimation procedure.

TABLE 1: Values of thermal conductivity, metabolic heat generation, and perfusion term.

Layer	Thermal conductivity (W/m-K)	Metabolic heat generation (W/m ³)	Perfusion (W/ m ³ -C)
Subcutaneous fat	0.21	400	800
Gland	0.48	700	2400
Muscle	0.48	700	2400
Tumor	0.48	14000–70000	48000

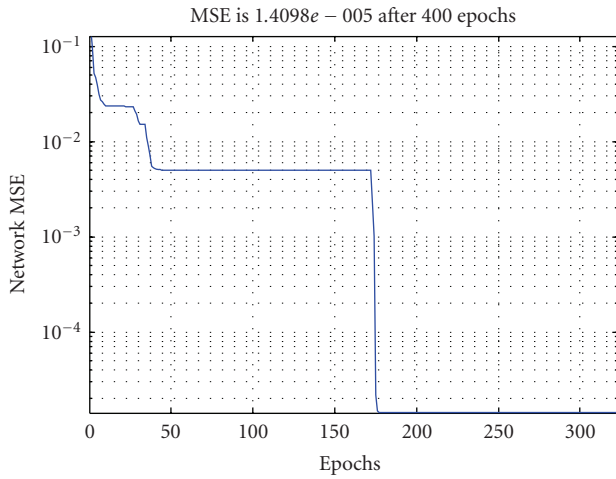


FIGURE 5: Convergence plot with mean squared error of the network output during training.

in binary form. The lower limit a and upper limit b for each of the three parameters were mentioned earlier.

The *fitness* of each *chromosome* is evaluated using the sum of the squares objective function given by (2). The *fitness* f of a *chromosome* is related to the sum of the squares function using

$$f = S_{\text{Max}} - S(\beta), \quad (3)$$

where S_{MAX} was arbitrarily chosen to be 10 so it always stays greater than the maximum value of sum of squares possible,

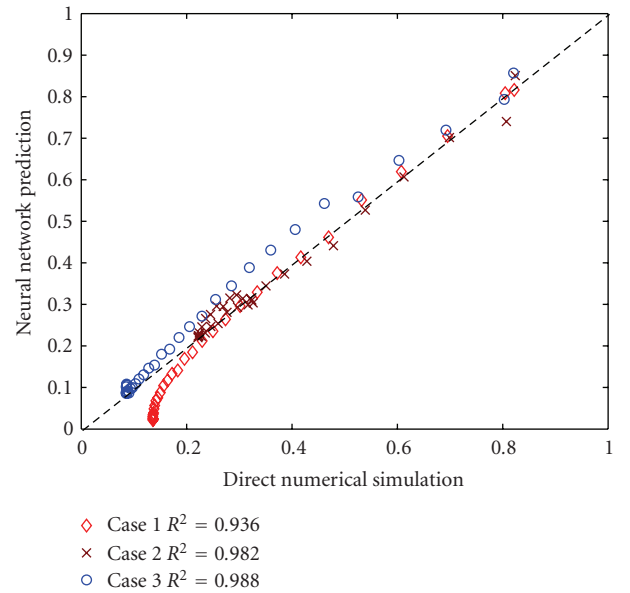


FIGURE 6: Comparison of output of trained ANN with finite element simulation.

and S is the sum of the squares generated using a parameter set (*chromosome*) β .

The *fitness* is determined for each parameter set (*chromosome*) and then ranked. *Chromosomes* of higher *fitness* are more likely to be selected to reproduce and contribute their genetic material to the next *generation*. A probability of

TABLE 2: Results from parameter estimation procedure to determine embedded tumor parameters using temperature data with 5% noise.

Case	Run	Actual			Estimated		
		Depth (m)	Diameter (m)	Heat generation (W/m ³)	Depth (m)	Diameter (m)	Heat generation (W/m ³)
1	1	0.015	0.008	25000	0.015	0.007	25440
	2				0.015	0.007	27302
2	1	0.015	0.012	40000	0.014	0.011	39126
	2				0.015	0.012	39619
3	1	0.035	0.008	25000	0.035	0.008	27028
	2				0.034	0.007	28396
4	1	0.035	0.012	40000	0.036	0.011	40330
	2				0.036	0.012	42082

TABLE 3: Results from parameter estimation procedure to determine embedded tumor parameters using temperature data with 10% noise.

Case	Run	Actual			Estimated		
		Depth (m)	Diameter (m)	Heat generation (W/m ³)	Depth (m)	Diameter (m)	Heat generation (W/m ³)
1	1	0.015	0.008	25000	0.016	0.007	23689
	2				0.014	0.010	21000
2	1	0.015	0.012	40000	0.015	0.012	39000
	2				0.014	0.011	40987
3	1	0.035	0.008	25000	0.040	0.010	20130
	2				0.039	0.010	20980
4	1	0.035	0.012	40000	0.037	0.012	35622
	2				0.038	0.014	36428

mutation (random changing of a *chromosome*) of 0.10 and a probability of *crossover* (formation of *children*) equal to 0.90 are used to determine how members of the *population* will reproduce to bring forth the next *generation*. A flowchart of the solution method is presented in Figure 4. More details about GA procedures and applications can be found in Goldberg [12] and Davis [13].

Several cases were simulated in order to validate the ability of the estimation procedure to accurately predict the depth, size, and heat generation rate of the embedded tumor. For each parameter set, two runs of the GA were conducted by introducing 5% and 10% noises in the simulation data to see the sensitivity of the prediction of breast tumor parameters.

5. Results and Discussion

A convergence plot of the mean squared error of the neural network output during training is shown in Figure 5. In general, the results obtained from ANN training were in good agreement with those obtained from finite element analysis model. After the ANN is trained, the network is validated for three different cases as shown in Figure 6. It can be seen from Figure 6 that, for each validation case, the output of the neural network model shows good agreement with the simulation results with R^2 values of 0.936, 0.982, and 0.988, respectively. To further validate the ANN results, the temperature profiles obtained for a specific case 3 (depth of 0.029 m, diameter of 0.008 m, and heat generation of 30000 W/m³) are compared with the finite element and ANN

models as shown in Figure 7. Once again a good comparison is seen.

The parameter estimates for the depth, diameter, and heat generation rate of the tumor for the four cases, corresponding to 5% and 10% random noise in the temperature rise on the skin surface, are presented in Tables 2 and 3, respectively. MATLAB built in function “*rand*” was used for generating random noise in the temperature rise on the skin surface. For each case, the GA was run twice with different random initial populations yielding similar results. With 5% random noise, the results show good agreement between actual and predicted parameters. In this case, the absolute errors in depth and size were within 0.001 m, and absolute errors in heat generation rate were within 3000 W/m³. With 10% noise, the accuracy of the estimated parameters deteriorates for deep seated tumors with low heat generation rate. In this case, the absolute errors in depth were within 0.005 m, error in size within 0.002 m, and in heat generation rate within 4870 W/m³.

6. Conclusions

An estimation methodology-based evolutionary algorithm using neural networks and genetic algorithms was developed to estimate the breast tumor parameters based on surface temperature profile that may be obtained by infrared thermography. The methodology is demonstrated with a simple model in order to illustrate the details of the procedures involved. For the cases studied, results from simulations show that it is possible to determine the depth, diameter, and

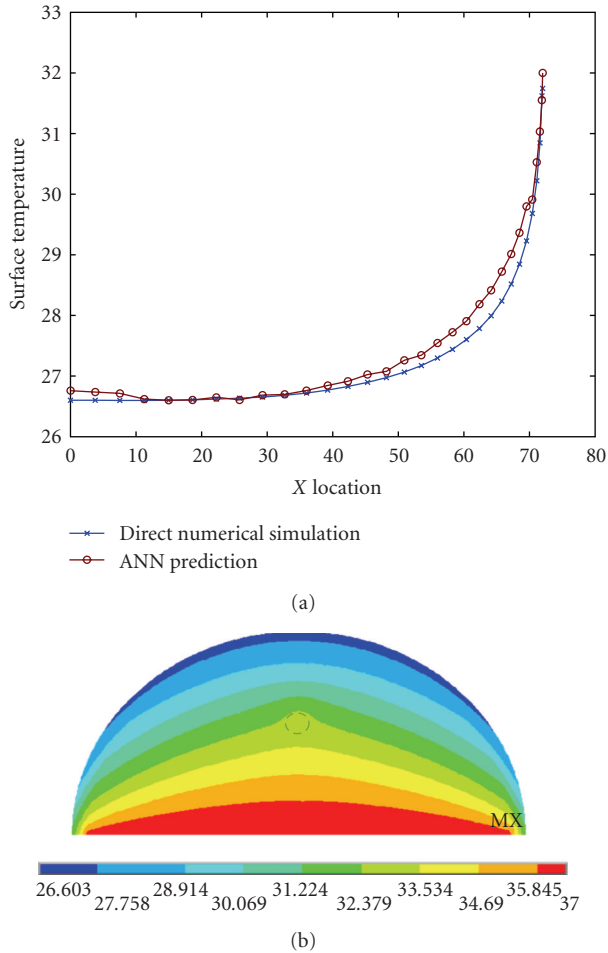


FIGURE 7: Comparison of temperature profile of trained ANN with direct numerical simulation.

heat generation rate from the surface temperature data (with 5% random noise) with good accuracy for the simplified 2D model. With 10% noise, the accuracy of the estimated parameters deteriorates for deep-seated tumors with low heat generation rate. With the recent advances in the accuracy of IR images and noise reduction techniques, it may be possible to reduce noise to within acceptable levels (5%) for the methodology to be effective. In general, the breast shape is complex, and this should be considered for realistic studies. However, the estimation methodology is general and can be applied even to realistic breast geometry. This may increase the computation time but the methodology can be easily extended. In order to further develop the proposed methodology so that it can be used in a clinical scenario, several aspects such as complexities of 3D breast geometry and the effects of nonuniform cooling should be considered in future investigations.

References

[1] R. N. Lawson, "Implications of surface temperatures in the diagnosis of breast cancer," *Canadian Medical Association Journal*, vol. 75, no. 4, pp. 309–310, 1956.

[2] R. N. Lawson and M. S. Chughtai, "Breast cancer and body temperatures," *Canadian Medical Association Journal*, vol. 88, pp. 68–70, 1963.

[3] W. C. Amalu, "A Review of Breast Thermography," International Academy of Clinical Thermology, 2003.

[4] J. Keyserlingk, P. Ahlgren, E. Yu, N. Belliveau, and M. Yassa, "Functional infrared imaging of the breast," *IEEE Engineering in Medicine and Biology Magazine*, vol. 19, no. 3, pp. 30–41, 2000.

[5] N. A. Diakides and J. D. Bronzino, *Medical Infrared Imaging*, CRC Press, Boca Raton, Fla, USA, 2007.

[6] N. M. Sudarshan, E. Y. K. Ng, and S. I. Teh, "Surface temperature distribution of a breast with and without tumour," *Computer Methods in Biomechanics and Biomedical Engineering*, vol. 2, no. 3, pp. 187–199, 1995.

[7] L. J. Romrell and K. I. Bland, "Anatomy of breast, axilla, chest wall, and related metastatic sites," in *The Breast: A Comprehensive Management of Benign and Malignant Diseases*, p. 22, Saunders, Philadelphia, Pa, USA, 1991.

[8] M. Mital and E. P. Scott, "Thermal detection of embedded tumors using infrared imaging," *Journal of Biomechanical Engineering*, vol. 129, no. 1, pp. 33–39, 2007.

[9] P. Russell and P. Norvig, *Artificial Intelligence: A Modern Approach*, Prentice Hall, Upper Saddle River, NJ, USA, 1995.

[10] J. Werner and M. Buse, "Temperature profiles with respect to inhomogeneity and geometry of the human body," *Journal of Applied Physiology*, vol. 65, no. 3, pp. 1110–1118, 1988.

[11] M. M. Osman and E. M. Afify, "Thermal modeling of the normal woman's breast," *Journal of Biomechanical Engineering*, vol. 106, no. 2, pp. 123–130, 1984.

[12] D. E. Goldberg, *Genetic Algorithms in Search, Optimization and Machine Learning*, Addison-Wesley, Reading, Mass, USA, 1989.

[13] L. Davis, *Handbook of Genetic Algorithms*, Van Nostrand Reinhold, New York, NY, USA, 1991.

Special Issue on Selected Papers from Workshop on Synergies in Communications and Localization (SyCoLo 2009)

Call for Papers

In conjunction with the IEEE International Conference on Communications (ICC) 2009 in Dresden, Germany, the International Workshop on Synergies in Communications and Localization (SyCoLo 2009) will be held.

The main objective of this workshop is to show how wireless communications and navigation/localization techniques can benefit from each other. With respect to these synergies the workshop aims at the following fundamental questions:

- How can navigation systems benefit from existing communications systems?
- How can communication systems benefit from positioning information of mobile terminals?

This workshop, whose proposal was jointly generated by the EU Research Projects WHERE and NEWCOM++, aims at inspiring the development of new position-aware procedures to enhance the efficiency of communication networks, and of new positioning algorithms based both on (outdoor or indoor) wireless communications and on satellite navigation systems.

The SyCoLo 2009 is, therefore, well in agreement with the new IJNO journal aims at promoting and diffusing the aims of joint communications and navigation among universities, research institutions, and industries.

This proposed IJNO Special Issue focuses all the research themes related to the timing aspects of joint communications and navigation, and starts from the SyCoLo 2009 where the Guest Editors will attend the different sessions and directly invite the authors of the most promising papers to submit an extended version of their papers to the journal.

The proposed Guest Editors are also part of the Scientific Committees of the SyCoLo 2009, therefore, directly involved in the evaluation of submitted papers.

Topics of interest will include, but are not limited to:

- Hybrid positioning using both wireless communications and satellite navigation systems
- Resource management with positioning information
- Location-aware PHY/MAC algorithms/procedures

- Indoor positioning combined with short-range communications
- Signal processing techniques for (seamless) indoor/outdoor localization

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/ijno/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	October 1, 2009
First Round of Reviews	January 1, 2010
Publication Date	April 1, 2010

Lead Guest Editor

Ronald Raulefs, German Aerospace Center (DLR), Institute of Communications and Navigation, Oberpfaffenhofen, Wessling 82234, Germany; ronald.raulefs@dlr.de

Guest Editors

Simon Plass, Institute of Communications and Navigation, German Aerospace Center (DLR), 82234 Wessling, Germany; simon.plass@dlr.de

Marco Luise, Dipartimento di Ingegneria dell'Informazione, Università di Pisa, Via G. Caruso 16, 56126 Pisa, Italy; marco.luise@iet.unipi.it

Special Issue on Artificial Intelligence in Neuroscience and Systems Biology: Lessons Learnt, Open Problems, and the Road Ahead

Call for Papers

Since its conception in the mid 1950s, artificial intelligence with its great ambition to understand intelligence, its origin and creation, in natural and artificial environments alike, has been a truly multidisciplinary field that reaches out and is inspired by a great diversity of other fields in perpetual motion. Rapid advances in research and technology in various fields have created environments into which artificial intelligence could embed itself naturally and comfortably. Neuroscience with its desire to understand nervous systems of biological organisms and system biology with its longing to comprehend, holistically, the multitude of complex interactions in biological systems are two such fields. They target ideals artificial intelligence has dreamt about for a long time including the computer simulation of an entire biological brain or the creation of new life forms from manipulations on cellular and genetic information in the laboratory.

The scope for artificial intelligence, neuroscience, and systems biology is extremely wide. The motivation of this special issue is to create a bird-eye view on areas and challenges where these fields overlap in their defining ambitions and where these fields may benefit from a synergetic mutual exchange of ideas. The rationale behind this special issue is that a multidisciplinary approach in modern artificial intelligence, neuroscience, and systems biology is essential and that progress in these fields requires a multitude of views and contributions from a wide spectrum of contributors. This special issue, therefore, aims to create a centre of gravity pulling together researchers and industry practitioners from a variety of areas and backgrounds to share results of current research and development and to discuss existing and emerging theoretical and applied problems in artificial intelligence, neuroscience, and systems biology transporting them beyond the event horizon of their individual domains.

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/aai/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking Sys-

tem at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	September 1, 2009
First Round of Reviews	November 1, 2009
Publication Date	December 1, 2009

Lead Guest Editor

Daniel Berrar, Systems Biology Research Group, Centre for Molecular Biosciences, School of Biomedical Sciences, University of Ulster, Cromore Road, Coleraine BT52 1SA, Northern Ireland; dp.berrar@ulster.ac.uk

Guest Editors

Naoyuki Sato, Department of Complex Systems, Future University Hakodate, 116-2 Kamedanakano-cho, Hakodate, Hokkaido 041-8655, Japan; satonao@fun.ac.jp

Alfons Schuster, School of Computing and Mathematics, Faculty of Computing and Engineering, University of Ulster, Shore Road, Newtownabbey BT37 0QB, Northern Ireland; a.schuster@ulster.ac.uk

Special Issue on Fuzzy Logic Techniques for Clean Environment

Call for Papers

The fuzzy technique for clean energy, solar and wind energy, is the most readily available source of energy, and one of the important sources of the renewable energy, because it is nonpolluting and, therefore, helps in lessening the greenhouse effect. The benefits arising from the utilization of solar and wind energy systems can be categorized into two sections: energy saving and the decrease of environmental pollution. The clean energy saving benefits come from the reduction in electricity consumption and from using any conventional energy supplier, which can avoid the expenditure of fuel supply. The other main benefit of the renewable energy is the decrease of environmental pollution, which can be achieved by the reduction of emissions due to the usage of electricity and conventional power stations. Electricity production using solar and wind energy is of the main research areas at present in the field of renewable energies, the significant price fluctuations are seen for the fossil fuel in one hand, and the trend toward privatization that dominates the power markets these days in the other hand, will drive the demand for solar technologies in the near term. The process of solar distillation is used worldwide for arid communities that do not have access to potable water. Also some solar technologies provide other benefits beside power generation, that is, fresh water (using desalination techniques).

The main focus of this special issue will be on the applications of fuzzy techniques for clean energy. We are particularly interested in manuscripts that report the fuzzy techniques applications of clean energy (solar, wind, desalination, etc.). Potential topics include, but are not limited to:

- Solar power station
- Wind power
- Photovoltaic and renewable energy engineering
- Renewable energy commercialization
- Solar cities
- Solar powered desalination unit
- Solar power
- Solar power plants
- Solar systems (company)
- World solar challenge

- Seawater desalination to produce fresh water
- Desalination for long-term water security

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/afs/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/>, according to the following timetable:

Manuscript Due	October 1, 2009
First Round of Reviews	January 1, 2010
Publication Date	April 1, 2010

Guest Editors

Rustom M. Mamlook, Middle East University for Graduate Studies, Amman, Jordan; rstmamlk@hotmail.com

Guest Editors

S. Paramasivam, ESAB Engineering Services Limited, Tamil Nadu 600 058, India; param@ieee.org

Mohammad Ameen Al-Jarrah, American University of Sharjah, P.O. Box 26666, Sharjah, UAE; mjarrah@aus.edu

Zeki Ayag, Kadir Has University, 34083 Istanbul, Turkey; zekia@khas.edu.tr

Ashok B. Kulkarni, University of Technology, Kingston 6, Jamaica; kulkarniab2@rediffmail.com