

MIT News

ON CAMPUS AND AROUND THE WORLD

SUBSCRIBE

BROWSE


SEARCH NEWS



Artificial neural networks model face processing in autism

A new computational model could explain differences in recognizing facial emotions.

Matthew Hutson | McGovern Institute for Brain Research
June 16, 2022

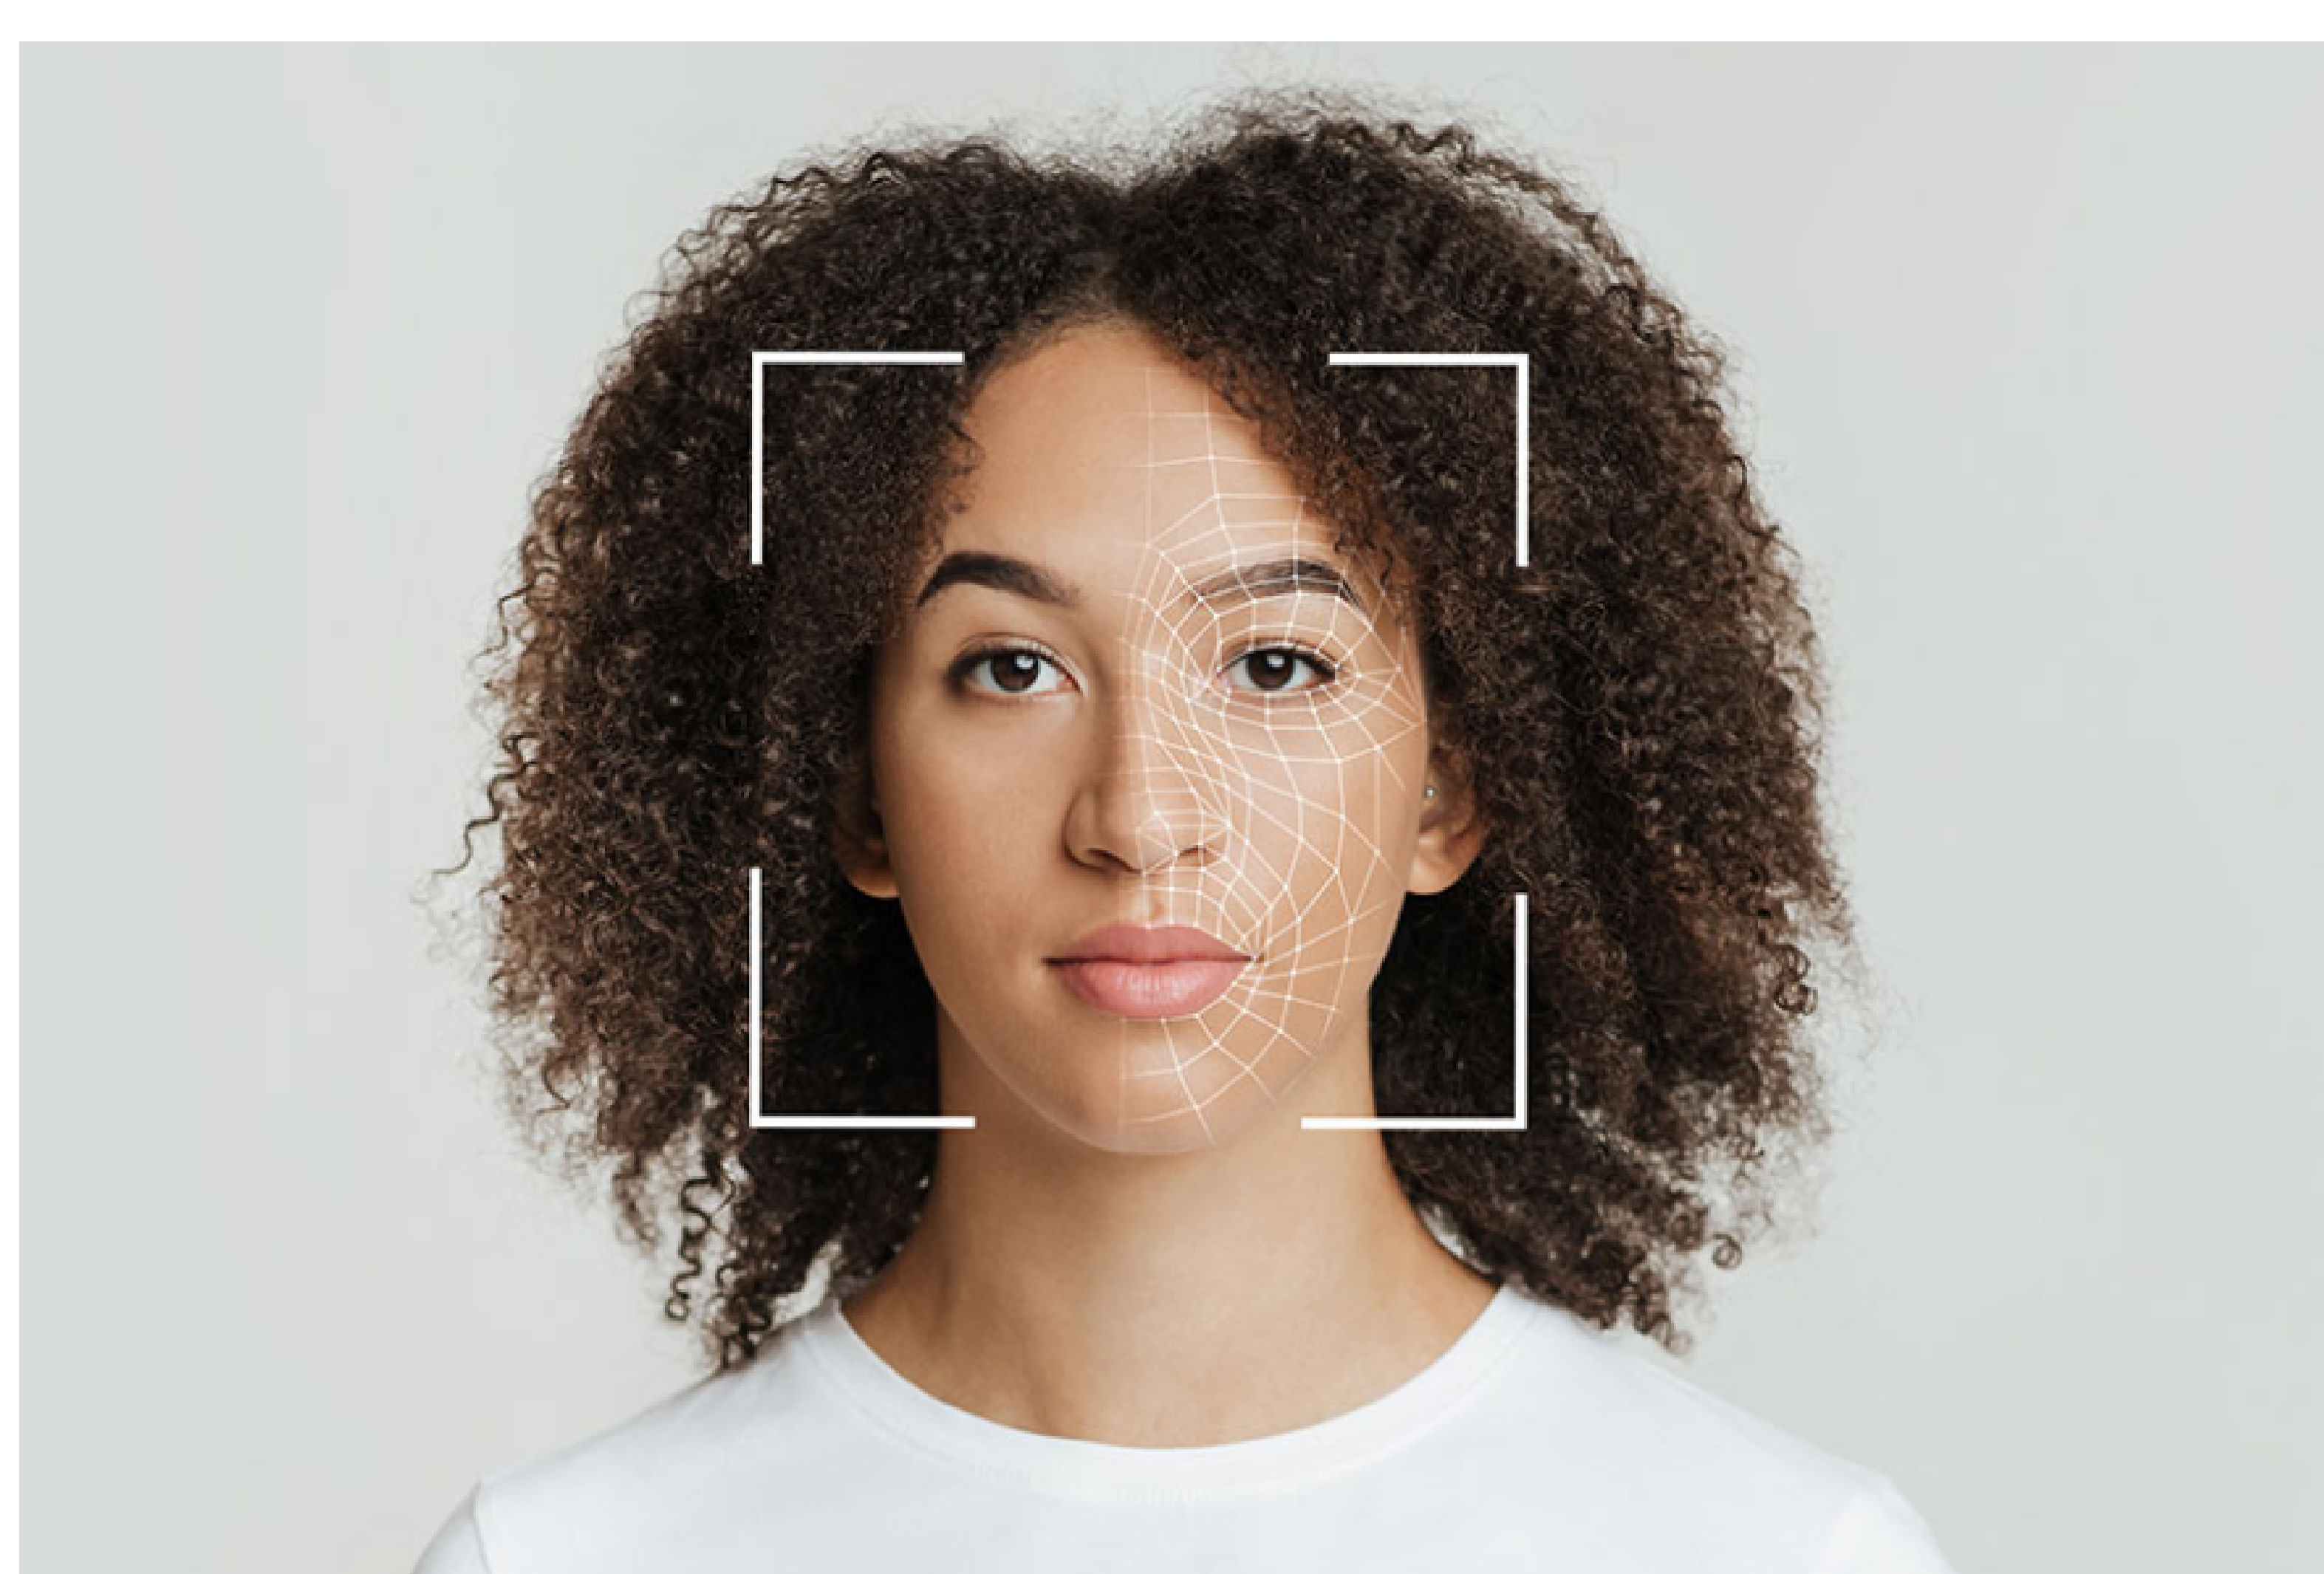

Many of us easily recognize emotions expressed in others' faces. A smile may mean happiness, while a frown may indicate anger. Autistic people often have a more difficult time with this task. It's unclear why. But new research, published June 15 in *The Journal of Neuroscience*, sheds light on the inner workings of the brain to suggest an answer. And it does so using a tool that opens new pathways to modeling the computation in our heads: artificial intelligence.

Researchers have primarily suggested two brain areas where the differences might lie. A region on the side of the primate (including human) brain called the inferior temporal (IT) cortex contributes to facial recognition. Meanwhile, a deeper region called the amygdala receives input from the IT cortex and other sources and helps process emotions.

Kohitij Kar, a research scientist in the lab of MIT Professor James DiCarlo, hoped to zero in on the answer. (DiCarlo, the Peter de Florez Professor in the Department of Brain and Cognitive Sciences, is a member of the McGovern Institute for Brain Research and director of MIT's Quest for Intelligence.)

Kar began by looking at data provided by two other researchers: Shuo Wang at Washington University in St. Louis and Ralph Adolphs at Caltech. In one experiment, they showed images of faces to autistic adults and to neurotypical controls. The images had been generated by software to vary on a spectrum from fearful to happy, and the participants judged, quickly, whether the faces depicted happiness. Compared with controls, autistic adults required higher levels of happiness in the faces to report them as happy.

Modeling the brain

Kar, who is also a member of the Center for Brains, Minds and Machines, trained an artificial neural network, a complex mathematical function inspired by the brain's architecture, to perform the same task. The network contained layers of units that roughly resemble biological neurons that process visual information. These layers process information as it passes from an input image to a final judgment indicating the probability that the face is happy. Kar found that the network's behavior more closely matched the neurotypical controls than it did the autistic adults.

The network also served two more interesting functions. First, Kar could dissect it. He stripped off layers and retested its performance, measuring the difference between how well it matched controls and how well it matched autistic adults. This difference was greatest when the output was based on the last network layer. Previous work has shown that this layer in some ways mimics the IT cortex, which sits near the end of the primate brain's ventral visual processing pipeline. Kar's results implicate the IT cortex in differentiating neurotypical controls from autistic adults.

The other function is that the network can be used to select images that might be more efficient in autism diagnoses. If the difference between how closely the network matches neurotypical controls versus autistic adults is greater when judging one set of images versus another set of images, the first set could be used in the clinic to detect autistic behavioral traits. "These are promising results," Kar says. Better models of the brain will come along, "but oftentimes in the clinic, we don't need to wait for the absolute best product."

Next, Kar evaluated the role of the amygdala. Again, he used data from Wang and colleagues. They had used electrodes to record the activity of neurons in the amygdala of people undergoing surgery for epilepsy as they performed the face task. The team found that they could predict a person's judgment based on these neurons' activity. Kar reanalyzed the data, this time controlling for the ability of the IT-cortex-like network layer to predict whether a face truly was happy. Now, the amygdala provided very little information of its own. Kar concludes that the IT cortex is the driving force behind the amygdala's role in judging facial emotion.

Noisy networks

Finally, Kar trained separate neural networks to match the judgments of neurotypical controls and autistic adults. He looked at the strengths or "weights" of the connections between the final layers and the decision nodes. The weights in the network matching autistic adults, both the positive or "excitatory" and negative or "inhibitory" weights, were weaker than in the network matching neurotypical controls. This suggests that sensory neural connections in autistic adults might be noisy or inefficient.

To further test the noise hypothesis, which is popular in the field, Kar added various levels of fluctuation to the activity of the final layer in the network modeling autistic adults. Within a certain range, added noise greatly increased the similarity between its performance and that of the autistic adults. Adding noise to the control network did much less to improve its similarity to the control participants. This further suggest that sensory perception in autistic people may be the result of a so-called "noisy" brain.

Computational power

Looking forward, Kar sees several uses for computational models of visual processing. They can be further prodded, providing hypotheses that researchers might test in animal models. "I think facial emotion recognition is just the tip of the iceberg," Kar says. They can also be used to select or even generate diagnostic content. Artificial intelligence could be used to generate content like movies and educational materials that optimally engages autistic children and adults. One might even tweak facial and other relevant pixels in what autistic people see in augmented reality goggles, work that Kar plans to pursue in the future.


Ultimately, Kar says, the work helps to validate the usefulness of computational models, especially image-processing neural networks. They formalize hypotheses and make them testable. Does one model or another better match behavioral data? "Even if these models are very far off from brains, they are falsifiable, rather than people just making up stories," he says. "To me, that's a more powerful version of science."

RELATED TOPICS

- Autism
- Research
- Brain and cognitive sciences
- Artificial intelligence
- Computer modeling
- Computer science and technology
- Neuroscience

- Center for Brains Minds and Machines
- McGovern Institute
- Quest for Intelligence
- School of Science


RELATED ARTICLES

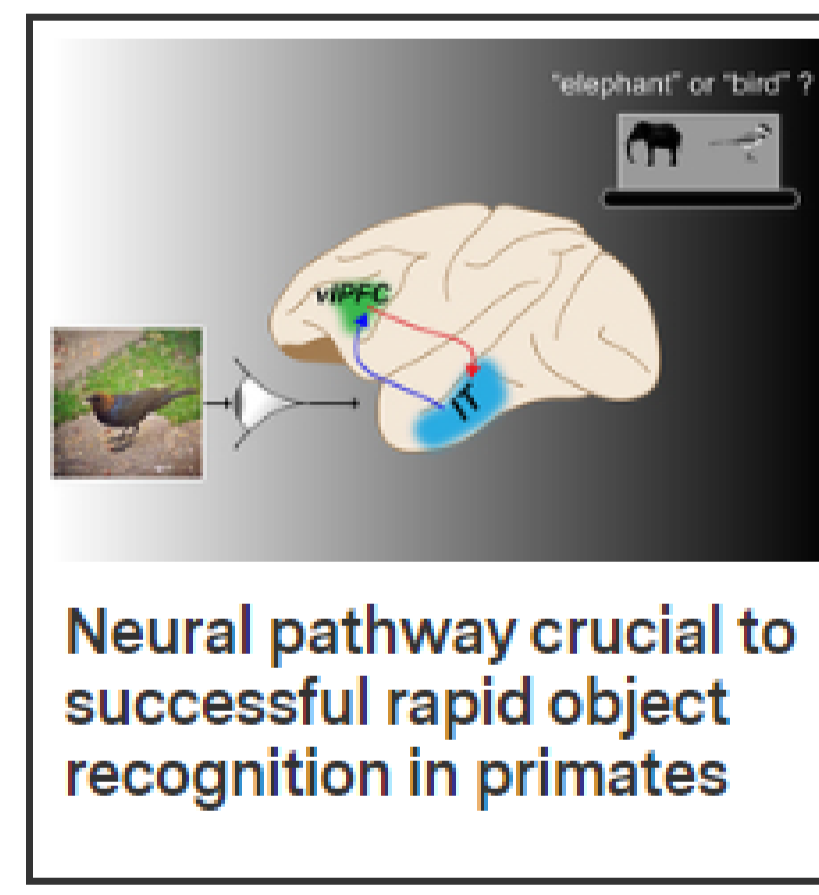

Neural pathway crucial to successful rapid object recognition in primates



Putting vision models to the test

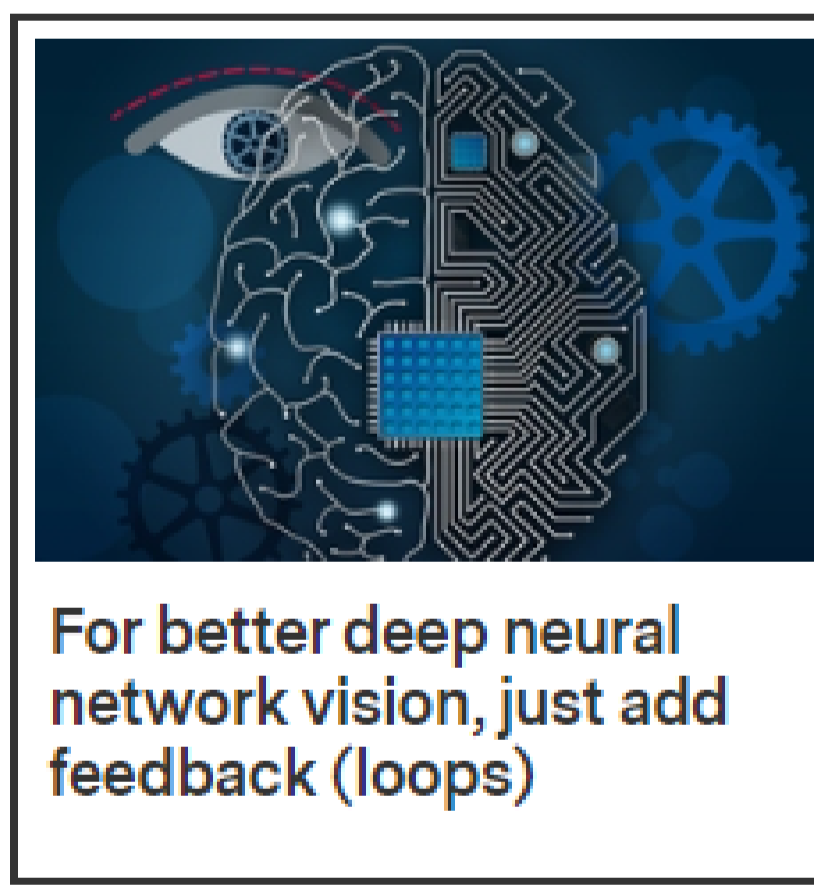

For better deep neural network vision, just add feedback (loops)




Educating national security leaders on artificial intelligence

Experts from MIT's School of Engineering, Schwarzman College of Computing, and Sloan Executive Education educate national security leaders in AI fundamentals.



Researchers teach an AI to write better chart captions

A new dataset can help scientists develop automatic systems that generate richer, more descriptive captions for online charts.

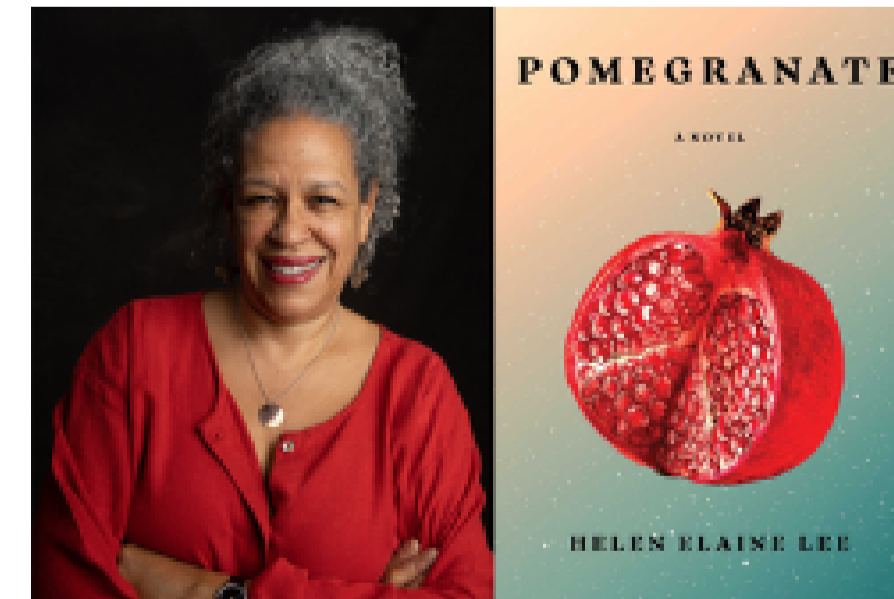

Q&A: A conversation with Helen Elaine Lee about her novel, "Pomegranate"

The MIT professor's new book explores the world of a woman set free from prison and redefining herself in society.



Transatlantic connections make the difference for MIT Portugal

The international partnership focuses on climate and sustainability.



Summer 2023 recommended reading from MIT

Enjoy these recent titles from Institute faculty and staff.



Studies at the intersection of equity, computing, and education

"The work I'm doing is deeply rooted in the belief that you can plant seeds in people," says graduate student Cecelié Sadler.

[More news on MIT News homepage](#) →

Please answer this nine-question survey to help us make MIT News content as useful and interesting to you as possible.

What is your primary reason for visiting MIT News today? Please pick one answer that is the best fit**

To read a particular article I saw mentioned somewhere else

To learn more about MIT

To find interesting news on science, engineering, or other types of research

To keep up with news from a particular MIT department, lab, or center

A different reason (please specify)

NEXT

SHARE



Paper: "A computational probe into the behavioral and neural markers of atypical facial emotion processing in autism"

PRESS MENTIONS

The Daily Beast

MIT researchers have developed a new computational model that could be used to help explain differences in how neurotypical adults and adults with autism recognize emotions via facial expressions, reports Tony Ho Tran for *The Daily Beast*. "For visual behaviors, the study suggests that [the IT cortex] plays a strong role," says research scientist Kohitij Kar. "But it might not be the only region. Other regions like amygdala have been implicated strongly as well. But these studies illustrate how having good [AI models] of the brain will be key to identifying those regions as well."

[Full story via The Daily Beast](#) →

RELATED LINKS

- [Kohitij Kar](#)
- [Jim DiCarlo](#)
- [Center for Brains, Minds and Machines](#)
- [McGovern Institute for Brain Research](#)
- [Department of Brain and Cognitive Sciences](#)
- [School of Science](#)

More MIT News

MIT News

ON CAMPUS AND AROUND THE WORLD

This website is managed by the MIT News Office, part of the [Institute Office of Communications](#).

News by Schools/College:

- [School of Architecture and Planning](#)
- [School of Engineering](#)
- [School of Humanities, Arts, and Social Sciences](#)
- [MIT Sloan School of Management](#)
- [School of Science](#)
- [MIT Schwarzman College of Computing](#)

[About the MIT News Office](#)

[MIT News Press Center](#)

[Terms of Use](#)

[Press Inquiries](#)

[Filming Guidelines](#)

[RSS Feeds](#)

Subscribe to MIT Daily/Weekly

Subscribe to press releases

Submit campus news

Guidelines for campus news contributors



Massachusetts Institute of Technology
77 Massachusetts Avenue, Cambridge, MA, USA
Visit [Map](#) [Events](#) [People](#) [Careers](#) [Contact](#)
[Privacy](#) [Accessibility](#) [Social Media Hub](#)

Education
Admissions + Aid
Alumni

Research
Campus Life
About MIT

Innovation
News

Join us in building a better world.